




**Longer Life.
Superb Design.**

The strict attention to design details, computerized modeling, quality materials and use of state of the art manufacturing methods give these pumps and their replacement parts superior durability and performance. The complete interchangeability of parts is maintained for other centrifugal pumps being used in the surface handling of drilling fluids by oilfield mud systems.

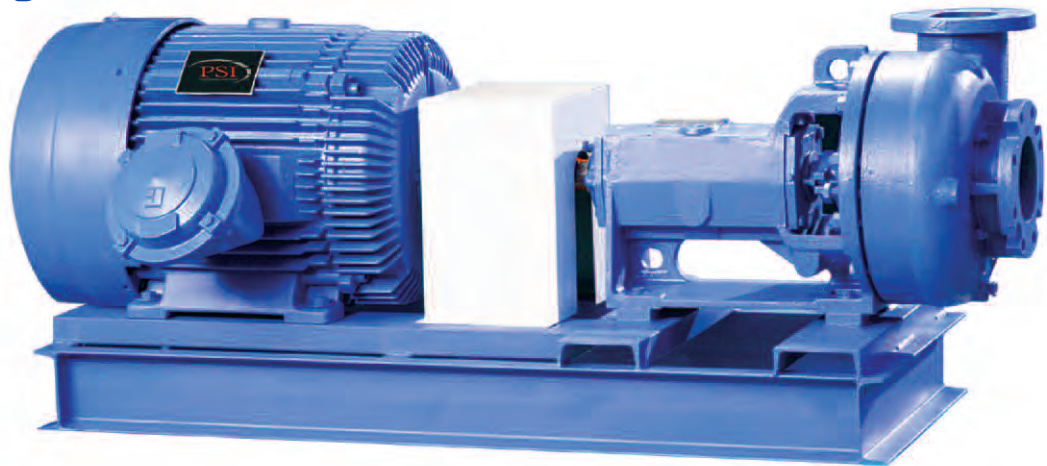

Applications

- Fresh Water
- Sea Water
- Drilling Mud

Standard Trim Includes:

- Frame** - Cast Iron
- Shaft** - 4140 Low alloy steel
- Shaft Sleeve** - 416 Stainless steel
- Casing** - Hard iron/Cast iron
- Wear Pad** - Hard iron
- Labyrinth Seals/Isolators** - Bronze
- Mechanical Seal** - Heavy duty tungsten carbide with Viton® bellows


Features

- Replaceable wear pads.
- Full and semi-open impellers.
- Stainless steel casing nuts.
- Inboard bearings consist of high quality double row angular contact ball bearings or cylindrical roller bearings.
- Outboard bearings consist of 2 high quality single row angular contact ball bearings.
- Mechanical seals combine tungsten carbide and Viton® bellows to extend seal life.
- Each skid mounted pump package is designed to ensure job site ease of maintenance and serviceability.



Sizes

- 3 x 2 x 13 in.
- 4 x 3 x 13 in.
- 5 x 4 x 14 in.
- 6 x 5 x 11 in.
- 6 x 5 x 14 in.
- 8 x 6 x 11 in.
- 8 x 6 x 14 in.

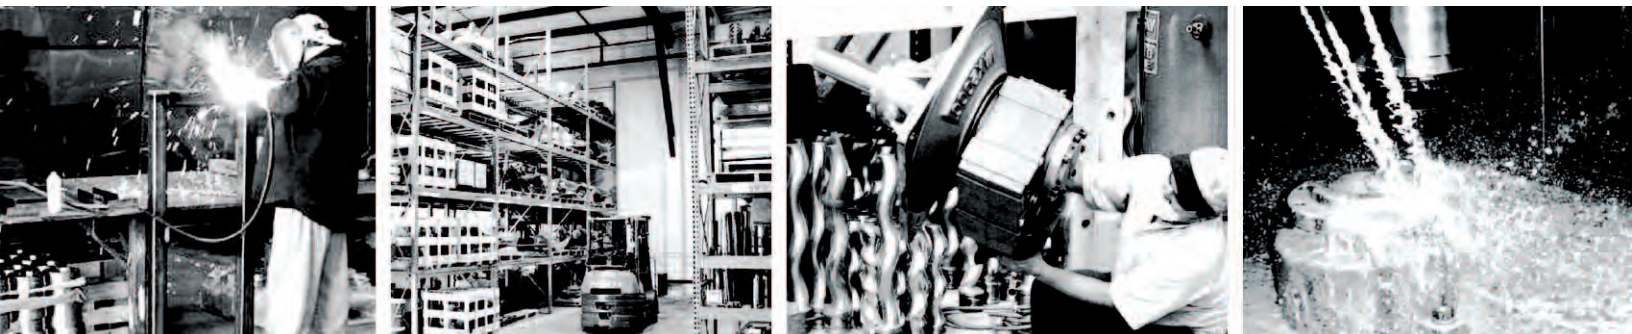

5119 Hiltonview Drive
Houston, Texas 77086

Phone (281) 893-4PSI (4774)

Toll-Free (866) 866-4PSI

Fax (281) 893-1027

WWW.PSIMAX2000.COM

